
DETAIL #: 0570-7001 System: AVM System 570

Planter Drain



AVM System 570 - Hot Rubber

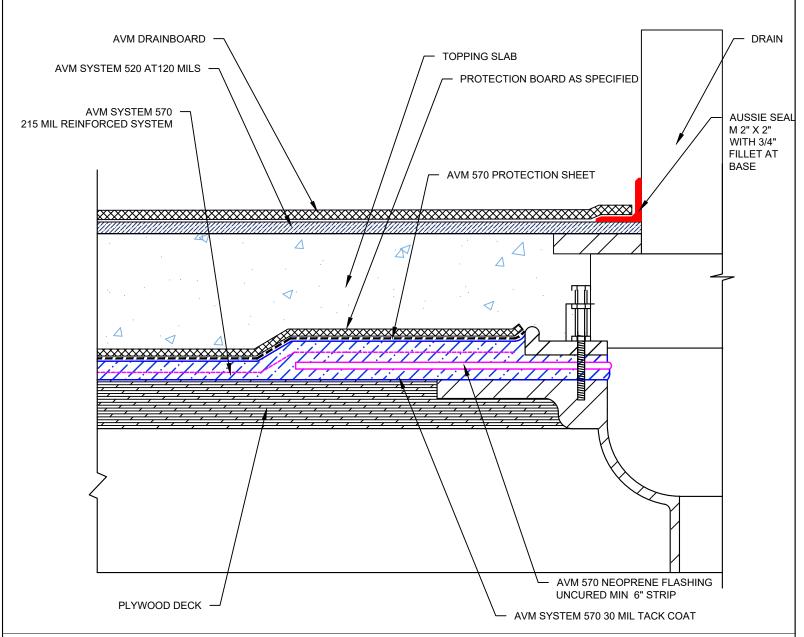

Notes:

- 1. Aussie Membrane 570 is a Hot Rubber(Hot-Applied Asphalt-Based Composition Membrane) for Between-Slabs, Planters, Roof-Gardens and similar type Waterproofing.
- 2. Typical membrane is 215 mils thick with fabric reinforcement. If specified differently, contact AVM for approval.
- 3. Contact AVM if no drain board or protection board is specified.
- 4. Remove/grind/repair as necessary any protrusions, sharp edges, etc that may puncture or damage the membrane.
- 5. Deck-to-Wall corners must be waterproofed as shown on AVM's Details.
- 6. Substrates must be sloped to drains and/or edges before membrane installation. (Min 1/4" per foot) Substrates must have sufficient drains and proper drainage systems to effectively evacuate excessive water.

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304 888.414.1041 818.888.0050 www.avmindustries.com