
DETAIL #:
AVM-502-0010-C
AVM System 502
Aussie II
VIEW TYPE:
Cut Sheet

Retaining Walls
Elevated Slab on Grade at Top of Footing
AVM System 502 Aussie II



Fluid Applied Waterproofing

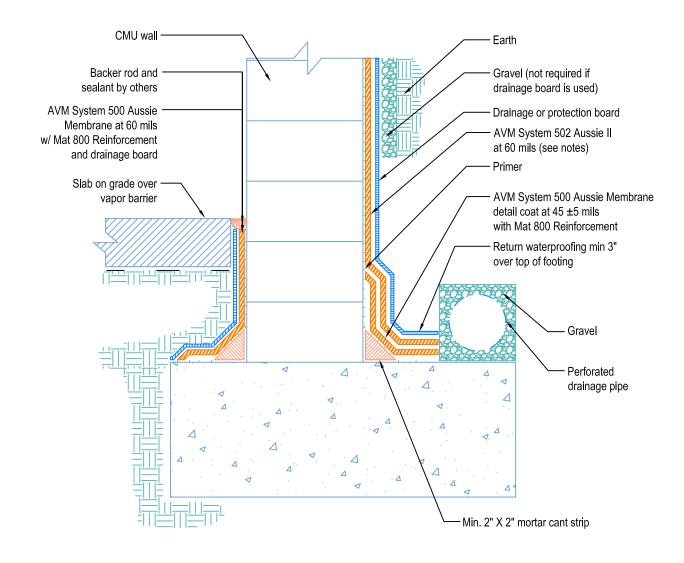

Notes:

- 1. Aussie II (AVM System 502) is a two-component, Water-Based Bitumen (Spray Applied) for Below-Grade, Lagging, Between-Slab, Planters, Roof-Gardens, Paver Systems and similar type Waterproofing.
- 2. For proper membrane thickness and appropriate protection and drainage, refer to AVM System 502, Aussie II's "Min Thickness Table"
- 3. Contact AVM if no drain board or protection board is specified
- 4. AVM's "bottom drain 12" may be accepted in lieu of the perforated drainage pipe (French drain.) Check local building codes for approval.
- 5. Inside corner (wall-to-footing) shown with Aussie Membrane corner detail.

FILE NAME: 0502-0010-C-Retaining-Walls-Elevated-Slab-On-Grade-At-Top-Of-Footing-CS.dwg

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304

Quality Waterproofing Products

888.414.1041 818.888.0050 www.avmindustries.com

Revision Date: 02/23/2012 Protected by Copyright © AVM Industries, Inc.