


DETAIL # :
AVM-502-6004-C
Aussie Membrane 502

VIEW TYPE:
Cut Sheet

Terminations at Sidewalks on Grade Aussie Membrane 502 Fluid Applied Waterproofing

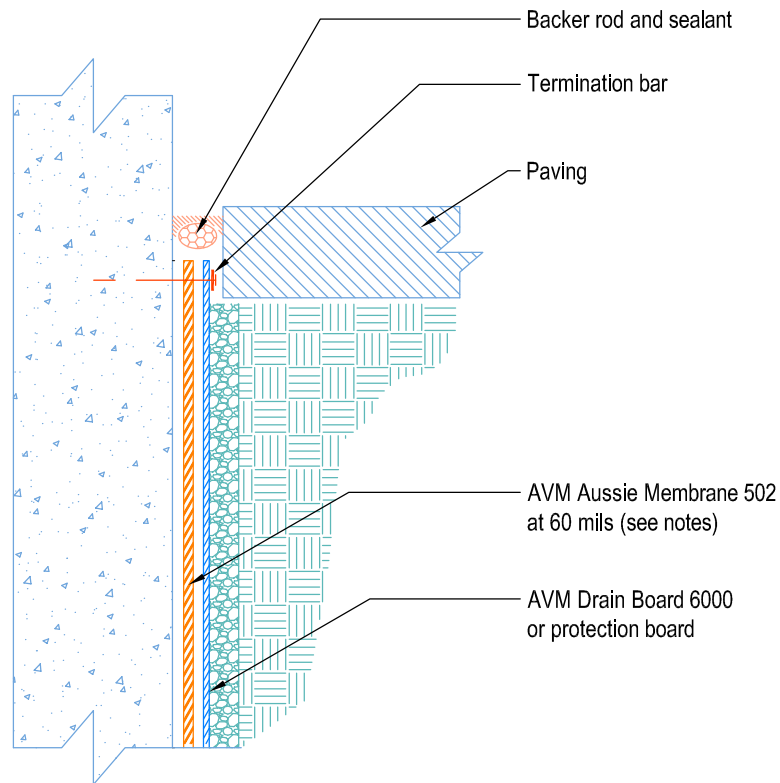

Notes:

1. Aussie Membrane 502 is a two-component, Water-Based Bitumen Membrane (Spray Applied) for Below-Grade, Lagging, Between-Slab, Planters, Roof-Gardens, Paver Systems and similar type Waterproofing.
2. In Non-Hydrostatic conditions: Min 60 Mil Dry Film Thickness (DFT). In Hydrostatic conditions: Min 90 Mil Dry Film Thickness (DFT)
3. Contact AVM if no drain board or protection board is specified.