


DETAIL # :	AVM-500-6502-C
AVM System 500 Aussie Membrane	
VIEW TYPE:	Cut Sheet

Cored Pipe Penetration Thru Wall

AVM System 500 Aussie Membrane

Fluid Applied Waterproofing

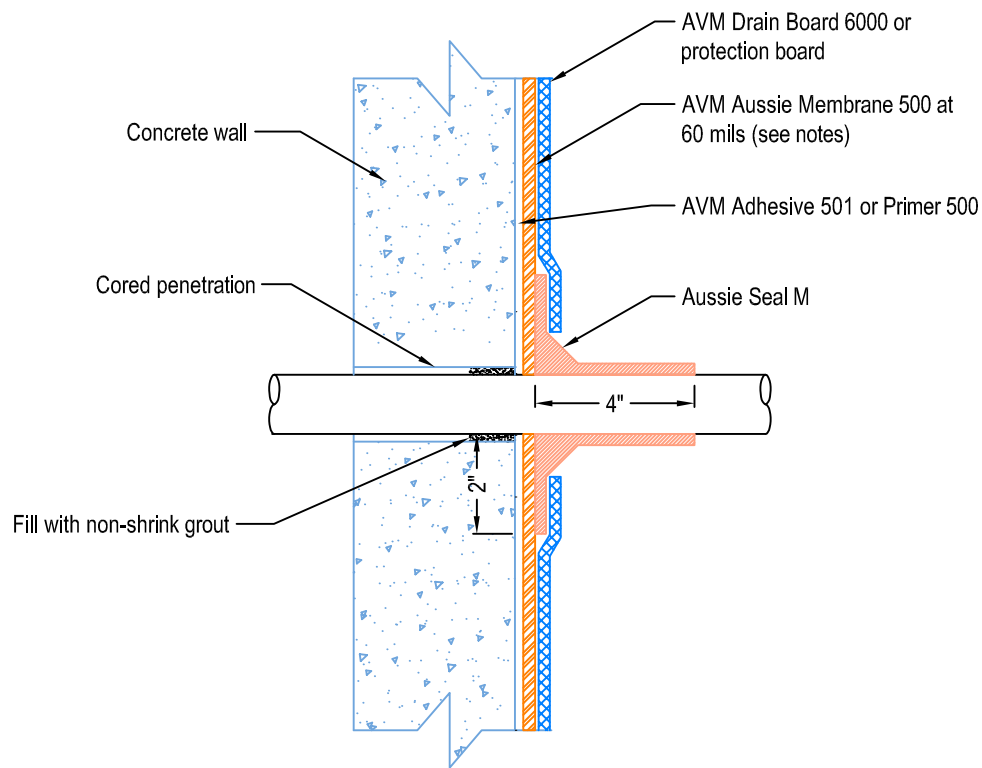

- Notes:**
1. Aussie Membrane 500 is a water-based bitumen (roller or brushed applied) for below-grade, between-slab, planters, roof-gardens and similar type waterproofing.
 2. In Non-Hydrostatic conditions: Min 60 Mils Dry Film Thickness (DFT). In Hydrostatic conditions: Min 90 Mils Dry Film Thickness (DFT)
 3. Contact AVM if no drain board or protection board is specified.
 4. With sealant around pipe.