

AUSSIE MATE 580-AL METHANE & VAPOR BARRIER



Manufactured, 3 layer, LARR Approved Waterproofing & Methane Barrier System

Aussie 580 AL is a patent pending material specifically designed to deliver waterproofing, vapor proofing and be a permanent methane barrier. Aussie 580 AL is a manufactured 3-layer system. Each layer is specifically designed to deliver industry leading capabilities and when combined create a strong barrier to water, vapor and methane. Note the three layers below that have been combined at our factories to deliver a single, easy to install system.

- Base sheet made of high-quality polymer. Acts as both a release liner when installed on vertical walls and a protection layer for the Bitumen when installed horizontally under slabs on grade.
- 2 60 mils of high quality rubberized-bitumen. This layer bonds aggressively to vertical walls as well as seals/bonds to the leading edges of the membrane, perimeter footings, penetrations, etc.
- The Aluminum outer skin provides near-O permeance of vapor, methane, radon as well as provides a minimum 6 months UV protection! The Aluminum layer is the patent pending technology that separates Aussie 580 from any other product on the market and what allows us to bring such a unique and efficient system to market.

Because AVM manufactures the three layers as a single system, there are no longer any concerns about the consistency of thickness or quality as compared to older spray-based technologies. This system installs quickly, does not require specialized equipment and can be left exposed to UV light for up to 6 months! Aussie 580 AL is a robust system. However, in the event of a puncture or damage due to standard construction activities the system is easily and quickly repaired by peeling sticking another piece of the same material over the damaged area.

AVM Industries strives to provide industry leading technology with the best support and warranties available today! Our team is happy to review soils reports, environmental reports and project specific details and then produce project specific recommendations and project specific details. Please contact AVM for all of your waterproofing and methane needs!

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304 888.414.1041 818.888.0050

www.avmindustries.com

TECH DATA SHEET
Sections - 071000 / 071300 / 071313 / 071326 / 071352

AVM Aussie Mate® 580-AL (Waterproofing/Methane) UV Stable Heavy Duty 60 Mil Below Grade Bituminous Sheet

Waterproofing Membrane and Methane Barrier with Aluminum Facer



Product Name

AVM Aussie Mate 580-AL

Manufactured by

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304 888.414.1041 818.888.0050 www.avmindustries.com

Product Description

The AVM Aussie Mate 580-AL is a UV stable, heavy duty 60 mil below-grade bituminous sheet waterproofing membrane and methane barrier with aluminum facer. AVM Aussie Mate 580-AL exhibits excellent adhesion, elongation and recovery properties. Unlike other sheet membranes, Aussie Mate® 580-AL can be exposed to U.V. up to 180 days.

Approvals

Aussie Mate 580-AL is approved by LARR (LARR #26138) for use as both a waterproofing membrane and/or methane barrier. This approval is based on tests and analysis in accordance with LADBS Acceptance Criteria LO21 Below-Grade Exterior Damp-Proofing and Waterproofing Materials and L137 Methane Barrier Test Criteria.

Where to Use

Retaining Walls: As a waterproofing membrane and/or methane barrier on below-grade. concrete, block walls, basements, etc.

Under Slabs: As a vapor barrier and/or methane barrier under concrete slabs.

Between-Slabs: As a waterproofing membrane.

Note: Installation requirements vary based on installation type and project requirements. Refer to Aussie Mate details and Installation Instructions for complete installation requirements.

Warranty

AVM Industries will warrant the installed membrane for a period of five (5) years. Extended warranties are available. For complete warranty details, contact AVM Industries or consult with your applicator.



Delivery, Storage, and Handling

- a. Delivery of all the AVM System 580-AL materials to the job site must be in their original sealed packaging, with manufacturer's name and label intact.
- b. Handle and store containers in accordance with printed instructions.
- c. Store at temperatures between 50°F and 90°F. Do not store materials in direct sunlight or where they may be damaged by water or rain.
- d. Failure to comply with the recommended storage conditions may result in premature deterioration of the product. For specific storage advice, please contact AVM Industries and/or its representatives.
- e. Keep all materials out of the reach of children.
- f. If irritation occurs during use, liberally flush affected areas with water. If irritation continues, see a physician immediately.

Project Conditions

- Concrete/block walls: All surfaces to which the Aussie Mate 580-AL is applied to must be sound and stable, with an even finish and free from dust, loose debris, grease, curing agents, etc. If necessary, apply a parge coat using AVM Crete 6200.
- 2. The **Aussie Mate 580-AL** may be applied to damp but not waterlogged surfaces (Green Concrete) with Adhesive 501 after 3 days and with Aussie Membrane 500 after 7 days.
- 3. Under slabs over compacted earth or mud slabs: All surfaces to which the Aussie Mate 580-AL is applied to must be sound and stable, with an even finish and free from sharp edges, loose debris, oil, grease, etc.
- 4. Do not apply materials at temperatures below 40°F and falling or if precipitation is imminent.
- 5. Warn personnel against hazards of materials to skin and eyes. Note other hazardous conditions on the job that might require special protective gear and or any other special protective or safety procedures.
- 6. Protect adjacent surfaces which could be damaged during the application procedure.
- 7. This system must not be used to cover Expansion Joints.



System Application

Review the AVM System 580-AL Installation Instructions and details prior to installation. On methane jobs, follow methane engineer's details and installation instructions. In some jurisdictions, continuous inspection by a registered deputy inspector certified by AVM Industries and registered in accordance with the requirements specified in LAMC Section 91.1704 for special inspections is required. Consult with AVM for details.

Quality Control

- a. Visually inspect all surfaces to ensure full and proper adhesion where applicable, especially at corners, seams, drains, footings and other hard-to-reach areas. On methane jobs, a smoke test or other verification is required.
- b. All unsatisfactory areas shall be repaired prior to final acceptance.

Protection of Installed Work

Always protect the waterproofing from possible damage. Use AVM Drainage Boards or AVM Approved Protective Panels.

Availability and Cost

Contact AVM Industries or your approved applicator for pricing and availability.

Technical Services

Technical services are available by contacting our offices at: 888.414.1041 or 818.888.0050 or visit www.avmindustries.com

PATENT PENDING: Some features of our product or assembly are protected under patent laws by one or more pending US patent(s).

System Specifications

Test method: LARR LO21

Descriptions	Standard	Requirement	Test Results	Pass/Fail
Water Vapor Permeance	ASTM E 96 water method	≤ 1	0.01 Perms	Pass
Resistance to Decay		Report Results	0.01 Perms	Pass
Samples Tested:	ASTM 154 / ASTM F 96 water method	≤ 10	% Change/Perms: 0%	Pass
Field Area, Factory Lap, Non-Factory Lap		≤ 10	% Weight Loss: 0%	Pass
Tension and Elongation (MD) % Elongation	ASTM D 2523 (Tested Bitumen w/Aluminum)	≥ 25	68 %	Pass
Tension and Elongation (CMD) % Elongation	ASTM D 2523 (Tested Bitumen w/Aluminum)	≥ 25	65 %	Pass
Tension and Elongation (Bitumen only)	ASTM D 2523	≥ 300%	Report Results	Pass
Adhesion to Concrete/Masonry (lbf/in.)	ASTM D 903	≥ 5	Pass	Pass
Puncture Resistance (lbf)	ASTM E 154	≥ 80	125 lbf	Pass
Hydrostatic Pressure Resistance (ft of water)	ASTM 751	Report Results	171 ft of water	Pass
Low Temperature Flexibility (MD) -20F°	ASTM D 5147	Pass or Fail	Pass	Pass
Low Temperature Flexibility (CMD) -20°	ASTM D 5147	Pass or Fail	Pass	Pass
Tensile Strength	ASTM D 412	Report Results	540 PSI	Pass
Bonded Seam Strength	ASTM D 882	Report Results	46 lbf	Pass
Methane Gas Transmission Rate (mL/day*m2*atm)	ASTM D4068 Anex A/D412	≤ 40	0.5	Pass
Microorganism Resistance (Soil Burial)	ASTM D4068 Anex A/D412	Pass or Fail	Pass	Pass
Oil Resistance Test	ASTM D543 / D412	Pass or Fail	Pass	Pass
Heat Aging	ASTM D 412	Pass or Fail	Pass	Pass
PCE Diffusion Coefficient	ASTM 96/96M-16	Report Results	2.26e-15m²/s	Pass
TCE Diffusion Coefficient	ASTM 96/96M-16	Report Results	4.58e-15m²/s	Pass
Benzene Diffusion Coefficient	ASTM 96/96M-16	Report Results	6.3e-15m²/s	Pass

Item/Component	Packaging	Approx Shipping Weights	Qty per Pallet	Voc	
Aussie Mate 580-AL 60-mil	3.28'x65.6' Roll (215 sq.ft.)	85.0 Pounds (38.7 Kg) / Roll	25 Rolls/Pallet	N/A	

For a complete list of details in CAD or PDF, please visit our website at **www.avmindustries.com**



TECH DATA SHEET

Sections - 071000 / 071300 / 071313 / 071326 / 071352



AVM Adhesive 501

Low VOC, Solvent-Based Contact Adhesive for Aussie Mate Below Grade Bituminous Waterproofing Sheet Membranes

Product Name

AVM Adhesive 501

Manufactured by

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304 888.414.1041 818.888.0050 www.avmindustries.com

Product Description

The AVM Adhesive 501 is a low-VOC, quick-drying, solvent-based, high-tack contact adhesive. AVM Adhesive 501 has a wide temperature application window, down to 25°F.

Where to Use

Use this adhesive with Aussie Mate® 580-AL, 582-AL and 585-CW sheet membranes. AVM Adhesive 501 is suitable for both vertical and horizontal applications at normal and low temperatures. (down to 25°F, -4°C) Its formulated to enhance the bond between AVM's Aussie Mate® bituminous waterproofing membranes and various substrates including Concrete and Masonry Units (CMU), Wood, Metal and Gypsum sheathings with glass mat facers.

Limitations

Do not use over ponding or standing water, snow or ice. Use in well-ventilated areas and avoid breathing vapors. The solvent in the Adhesive Attacks Polystyrene insulation.! Do not apply Adhesive 501 when rain is imminent. Do not allow Adhesive 501 to puddle, as this will lengthen drying times. Cold weather will extend drying times.

Warranty

AVM's standard 1-year material warranty applies. This product is sold as part of a waterproofing system. Please refer to those system's warranties for additional warranty information.

Delivery, Storage, and Handling

- a. Delivery of the AVM Adhesive 501 to the job site must be in its original sealed packaging, with manufacturer's name and label intact.
- b. Handle and store containers in accordance with printed instructions. Flammable. Store in a well-ventilated area.
- c. Shelf Life: One year in un-opened containers when protected from UV light and stored in dry conditions at temperatures between 40°F and 90°F.
- d. Failure to comply with the recommended storage conditions may result in premature deterioration of the product.
- e. Keep all materials out of the reach of children.
- f. If irritation occurs during use, liberally flush affected areas with water. If irritation continues, see a physician immediately.

Project Conditions

- All surfaces to which the ADHESIVE 501 is applied to must be sound, stable, dry, with an even finish and free from dust, loose debris, grease, curing agents, etc. Concrete surface profile (CSP) should be 6 or smoother. If necessary, apply a parge coat using AVM Crete 6200. Do not apply to frozen substrates.
- Structural concrete must be cured for at least 72 hours. Lightweight structural concrete must be cured for at least 14 days. Install membrane over smooth concrete blocks (CMU). If the blocks are rough or the mortar joints are tooled, parge the surfaces with AVM Crete 6200 to make them smooth. Allow parge coat to dry before the substrate is primed and the membrane is installed.

System Application

Read the AVM Adhesive 501 Installation Instructions Prior to Installation. Application instructions vary based on type of application and the type of surfaces it's being applied to.

- Ready to use do not dilute
- Solvent Based use with adequate ventilation
- · Light mixing is recommended before use.

- Apply materials in dry weather, when ambient temperatures are between 25°F and 100°F. Do not leave exposed to U.V. Cover with membrane as soon as possible.
- Apply Adhesive 501 at the rate of 300-400 sqft per gallon with a short-nap or 3/8" (10mm) nap roller or with a brush. Do not pour the Adhesive 501 directly onto the substrates
- 3. Application of the Adhesive 501 should be limited to an area that will be covered by a waterproofing membrane the same day. If the application area is not covered by a waterproofing membrane the same day, Adhesive 501 must be reapplied before installation of the waterproofing membrane.
- 4. Allow Adhesive 501 to completely dry before applying the membrane. To test if the primer is set press your forefinger on to the primed surface. When you lift your finger, there should be no strings of polymer that pull up with your finger. High humidity, cooler temperatures and porous substrates will need additional drying times.
- 5. Warn personnel against hazards of materials to skin and eyes. Note other hazardous conditions on the job that might require special protective gear and or any other special protective or safety procedures.
- Protect adjacent surfaces which could be damaged during the application procedure.

Quality Control

- Visually inspect all surfaces to ensure full and proper adhesion, especially at corners, seams, drains, footings and other hard-toreach areas.
- b. All unsatisfactory areas shall be repaired prior to final acceptance.

Protection of Installed Work

Always protect the waterproofing from possible damage. Use AVM Drainage Boards or AVM Approved Protective Panels.

Availability and Cost

Contact AVM Industries or your approved applicator for pricing and availability.

Technical Services

Technical services are available by contacting our offices at: 888.414.1041 or 818.888.0050 or visit www.avmindustries.com

System Specifications

Item/Component	Packaging	Approx Shipping Weights	Qty per Pallet	Coverages	voc
ADHESIVE 501	5-Gal Buckets	41.0 lbs./Bucket	36 Buckets/Pallet	300-400 sqft/Gal *	<100 g/l

Actual coverages may vary based on substrate conditions and other factors.

For a complete list of details in CAD or PDF, please visit our website at www.avmindustries.com

Sections - 071000



Aussie Seal® M Marine-Grade Sealant/Adhesive

Thermal and Moisture Protection

Sections 071000 Fluid Applied Waterproofing

Product Name

Aussie Seal® M

Manufactured by

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304 888.414.1041 818.888.0050 www.avmindustries.com

Product Description

Aussie Seal® M is an extra heavy duty, easy to install, Marine-Grade moisture cure polyether Sealant / Adhesive formulated for applications above the water line or after curing below the water line and in areas where solvent based materials are not tolerated. Aussie Seal® M is solvent free and contains no isocyanates. It will not shrink upon curing, will not discolor when exposed to U.V., and will not "out-gas" or bubble on damp surfaces as urethane sealants often do. The sealant has resilient elastomeric properties and excellent adhesion to most substrates. It can be used effectively in many difficult conditions, cures rapidly in dry or wet climates, (including under freshly poured concrete) and low temperatures compared to urethane based materials.

Where to Use

As a stand-alone sealant or adhesive or in conjunction with many types of waterproofing systems including Below grade bituminous and polyurethane membranes, HDPE Membranes, Acrylic and Urethane Deck Coatings, etc. **Aussie Seal* M** was specifically designed to be used with AVM's waterproofing systems including AVM System 100, Elasto Fiberdeck*, AVM System 100 Forevercoat*, Aussie Membrane* 500, Aussie Membrane* 502, Aussie Skin* 550, Aussie Hot Rubber 570, Aussie Mate* 580-AL, AVM System 650, AVM System 680, AVM System 700 and AVM System 750.

Aussie Seal* M may be applied to many substrates including galvanized and bondarized metal, steel, aluminum, copper, cast iron, PVC and ABS pipes, acrylic coatings, polyurethane coatings, HDPE (Aussie Skin sand side and HDPE side), bitumen (Aussie Membranes 500/502), to the aluminum side of Aussie Mate* 580-AL, wood, glass and many other common substrates.

Substrate Preparation:

Bonding surfaces must be clean, dry and free of oxidation, mill oils, wax, and release agents that may interfere with adhesion. Dry and fully cure painted surfaces before bonding. Alcohol and ammonia water are effective cleaners for surface preparation. Abraded or irregular surfaces are acceptable bonding surfaces but must be clean and sound.

Application Method:

Aussie Seal® M is a gun grade material that is applied from caulking guns, high viscosity pump guns, or automated bead application equipment. This product sets rapidly upon exposure to moisture. Open containers must be quickly protected from atmospheric moisture. Mask off areas that must be protected from adhesives. Allow the assembly to cure for 30 minutes to an hour before handling or machining. When bonding two impermeable materials, brief separation and reassembly of the bonding surfaces to expose the adhesive to atmospheric moisture will often accelerate the cure. In extremely dry environments, local humidification may be needed to initiate curing. Low temperature will retard the cure reaction and heat will accelerate the cure reaction. Optimum application temperatures are between 60°F to 100°F (16°C to 38°C). Sealant can be applied at temperatures as low as 20°F (-7°C). For applications below 20°F, refer to cold weather application procedures below.

Aussie Seal* M is a moisture cure sealant that in most cases can be installed in wet or damp environments. Typical cure time is 12-24 hours depending on thickness of sealant and environmental conditions. Do not subject the un-cured sealant to hydrostatic conditions. However, in some cases, it may be allowed. Contact your AVM rep for details.

Cold Weather Application (20°F - 50°F) - Keep the sealant warm prior to use. (Store in a warm room or tent at 70°F) Apply the sealant while still warm. If needed, use a heat gun to blow hot air to pre-heat the substrates. Check for proper adhesion once installed.. In very cold weather this may take 14+ days.

If your project requirements do not conform to the above requirements, please contact your local AVM rep for further instructions.

Warranty

AVM warrants Aussie Seal® M's performance, provided it is properly stored and applied within 1 year. If Aussie Seal® M is proved to be defective, return remaining product and purchase receipt for refund or replacement of product exclusive of labor or cost of labor. This is the sole and exclusive remedy for defects or failure of this product. User must read and follow the direction of the current Technical Data Sheet and SDS prior to product use. User determines suitability of product for intended use and assumes all risks. AVM shall not be liable for damages (including consequential or incidental damages) in excess of the purchase price, except where such exclusion or limitation is prohibited by state law. This warranty is in lieu of all other warranties, written or oral, statutory, express or implied including any warranty of merchantability or fitness for a particular purpose; except for the above express warranty given by AVM, the product is sold with all faults. AVM shall not be responsible for the use of this product in a manner to infringe on any patent or any other intellectual property rights held by others. For additional warranty claim information, call 818-888-0050.

Delivery, Storage, and Handling

- Delivery of all the Aussie Seal* M materials to the job site must be in their original sealed containers, with manufacturer's name and label intact.
- Shelf Life: Twelve months from date of manufacture when stored at 70°F / 21°C with 50% relative humidity. High temperature and high relative humidity may significantly reduce shelf life. Pails have a shelf life of six months.
- Store at temperatures between 50°F and 75°F. Do not store materials in direct sunlight or where they may be damaged by water or rain.
- Failure to comply with the recommended storage conditions may result in premature deterioration of the product.
- Keep all materials out of the reach of children.

Quality Control

- Visually inspect all coated surfaces to ensure a full and proper application, especially at penetrations, seams, corners, drainage footings and other hard-to-reach areas
- b. All unsatisfactory areas shall be repaired prior to final acceptance.

Availability and Cost

Contact AVM Industries or your approved applicator for pricing and availability.

Technical Services

Technical services are available by contacting our offices at: 888.414.1041 or 818.888.0050 or visit www.avmindustries.com

The following coverages are based on controlled tests. Actual coverages may vary.

Technical Information		
Viscosity	1,200,000 +/- 400,000 cp at 72°F 22°C)	Brookfield RVF, TF spindle, 4 RPM
Density	11.8 +/- 0.2 lbs per gallon	ASTM D1475
Tack Free Time	20 +/- 10 min	45 +/- 5 % R.H.
Elongation at Break	275 - 325%	ASTM D412
Tensil Strength	325 - 375 psi	ASTM D412
Hardness Shore A	38 - 42	ASTM C661
Low Temp. Flex	-10°F (-23°C) Pass1/4 inch mandrel	ASTM D816
VOC Content	Less than 15 g/l	ASTM D2369
Shrinkage	No visible shrinkage after 14 days	
Service Temp.	-40°F to 200°F / -40°C to 93°C	

20 oz Sausages, 5 gallon pails and 50 gallon drums are available by special order. Standard color is gray. White or Black are available by special order. All properties described in this document are derived from testing conducted in laboratory conditions. Properties and performance will vary depending on environmental conditions and application technique. Test and evaluate to determine appropriate usage. Visit www.avmindustries.com for the Safety Data Sheet and pertinent documentation.

For a complete list of details in CAD or PDF, please visit our website at www.avmindustries.com.

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304 888.414.1041 818.888.0050

Quality Waterproofing Products





AVM Aussie Mate 580-AL AVM Bituminous Sheet Waterproofing Membrane

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Revision date: 02/24/2017 Supersedes: Version: 1.0

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product name : AVM Aussie Mate 580-AL

Product form : Mixtures

Other means of identification : Bituminous Sheet Waterproofing Membrane with Aluminum Protection Layer

1.2. Relevant identified uses of the substance or mixture and uses advised against

1.3. Details of the supplier of the safety data sheet

AVM Industries, Inc. 8245 Remmet Ave Canoga Park, CA 91304 Tel: 818-888-0050 Fax: 818-888-0030 www.avmindustries.com

1.4. Emergency telephone number

No additional information available

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

Carc. 2 H351

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US)



GHS08

Signal word (GHS-US) : Warning

Hazard statements (GHS-US) : H351 - Suspected of causing cancer

Precautionary statements (GHS-US) : P201 - Obtain special instructions before use

P202 - Do not handle until all safety precautions have been read and understood P280 - Wear eye protection, face protection, protective gloves, protective clothing

P308+P313 - If exposed or concerned: Get medical advice/attention

P405 - Store locked up

P501 - Dispose of contents/container to a licensed hazardous-waste disposal contractor or collection site except for empty clean containers which can be disposed of as non-hazardous waste

2.3. Other hazards

No additional information available

2.4. Unknown acute toxicity (GHS US)

No data available

SECTION 3: Composition/information on ingredients

3.1. Substances

Not applicable

3.2. Mixtures

Name	Product identifier	%
Asphalt	(CAS No) 8052-42-4	15 - 40*
Talc	(CAS No) 14807-96-6	10 - 30*

^{*}In accordance with paragraph (i) of the OSHA Hazard Communication Standard (29 CFR §1910.1200), the specific chemical identity or exact weight % has been withheld as a trade secret

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 4: First aid measures

Description of first aid measures

First-aid measures general : If exposed or concerned, get medical attention/advice. Show this safety data sheet to the

doctor in attendance. Wash contaminated clothing before re-use. Never give anything to an

unconscious person.

IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing. Get First-aid measures after inhalation

medical attention if breathing is affected. If breathing is difficult, supply oxygen.

First-aid measures after skin contact IF ON SKIN (or clothing): Remove affected clothing and wash all exposed skin with water for at

least 15 minutes. If irritation develops or persists, get medical attention.

: IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Remove contact First-aid measures after eye contact

lenses if present and easy to do so. Continue rinsing if pain, blinking, or irritation develops or

persists, get medical attention. Continue rinsing.

: IF SWALLOWED: rinse mouth thoroughly. Do not induce vomiting without advice from poison First-aid measures after ingestion

control center. Get medical attention if you feel unwell.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms/injuries : Suspected of causing cancer. Symptoms/injuries after inhalation : May cause respiratory irritation. Symptoms/injuries after skin contact : May cause skin irritation.

Symptoms/injuries after eye contact : Direct contact with eyes is likely to be irritating.

Symptoms/injuries after ingestion : May cause gastrointestinal irritation. : Suspected of causing cancer. Chronic symptoms

Indication of any immediate medical attention and special treatment needed

No additional information available.

SECTION 5: Fire-fighting measures

Extinguishing media

Suitable extinguishing media : Dry powder. Carbon Dioxide (CO₂). Earth. Sand. Foam.

Unsuitable extinguishing media

Special hazards arising from the substance or mixture

: No dangerous reactions known under normal conditions of use. Reactivity

5.3. Advice for firefighters

Precautionary measures fire Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No

Firefighting instructions Use water spray or fog for cooling exposed containers. Exercise caution when fighting any

chemical fire. Do not dispose of fire-fighting water in the environment.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection.

Other information Vapor is heavier than air. Combustion produces toxic gases.

SECTION 6: Accidental release measures

Personal precautions, protective equipment and emergency procedures

: Evacuate area. Ventilate area. Keep upwind. Spill should be handled by trained clean-up crews General measures

properly equipped with respiratory equipment and full chemical protective gear (see Section 8).

6.1.1. For non-emergency personnel

: Wear Protective equipment as described in Section 8. Protective equipment

Emergency procedures : Evacuate unnecessary personnel.

6.1.2 For emergency responders

Protective equipment : Wear suitable protective clothing, gloves and eye or face protection. Approved supplied-air

respirator, in case of emergency.

6.2. **Environmental precautions**

Prevent entry to sewers and public waters. Notify authorities if liquid enters sewers or public waters. Avoid release to the environment.

Methods and material for containment and cleaning up 6.3.

Contain any spills with dikes or absorbents to prevent migration and entry into sewers or For containment

: Soak up spills with inert solids, such as clay or diatomaceous earth as soon as possible. This Methods for cleaning up material and its container must be disposed of in a safe way, and as per local legislation.

6.4. Reference to other sections

See Sections 8 and 13.

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling

: Do not handle until all safety precautions have been read and understood. Do not get in eyes, on skin, or on clothing. Wash hands and other exposed areas with mild soap and water before eating, drinking or smoking and when leaving work.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions

: Keep the container tightly closed. Store in dry, cool, well-ventilated area. Store away from Oxidizing agents. Peroxides, and Food items.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Asphalt (8052-42-4)	
ACGIH TWA	0.5 mg/m³
Remark (OSHA)	OELs not established
Talc (14807-96-6)	
ACGIH TWA	2 mg/m³ particulate matter containing no asbestos and <1% crystalline silica, respirable fraction
OSHA PEL (TWA)	20 mppcf if 1% Quartz or more, use Quartz limit

8.2. Exposure controls

Appropriate engineering controls

: Provide adequate general and local exhaust ventilation. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof equipment with flammable materials. Ensure adequate ventilation, especially in confined areas.

Personal protective equipment

: Gloves. Protective goggles. Protective clothing.







Hand protection

Use gloves chemically resistant to this material when prolonged or repeated contact could occur. Gloves should be classified under Standard EN 374 or ASTM F1296. Suggested glove materials are: Neoprene, Nitrile/butadiene rubber, Polyethylene, Ethyl vinyl alcohol laminate, PVC or vinyl. Suitable gloves for this specific application can be recommended by the glove supplier.

Eye protection

: Wear eye protection, including chemical splash goggles and a face shield when possibility exists for eye contact due to spraying liquid or airborne particles.

Skin and body protection

: Wear long sleeves, and chemically impervious PPE/coveralls to minimize bodily exposure.

Respiratory protection

Use NIOSH (or other equivalent national standard) -approved dust/particulate respirator. Where vapor, mist, or dust exceed PELs or other applicable OELs, use NIOSH-approved respiratory protective equipment.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Solid
Color : Black.
Odor : Asphalt.

Odor Threshold : No data available pΗ : No data available Relative evaporation rate (butylacetate=1) : No data available Melting point : No data available Freezing point : No data available Boiling point : No data available Flash point : No data available Auto-ignition temperature : No data available Decomposition temperature No data available Flammability (solid, gas) : No data available Vapour pressure : No data available Relative vapour density at 20 °C : No data available Relative density : No data available

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Solubility : Insoluble in water. Log Pow : No data available Log Kow : No data available Viscosity, kinematic : No data available Viscosity, dynamic : No data available Explosive properties : No data available Oxidising properties : No data available **Explosive limits** : No data available

9.2. Other information

No additional information available

SECTION 10: Stability and reactivity

10.1. Reactivity

No dangerous reactions known under normal conditions of use.

10.2. Chemical stability

Stable under recommended handling and storage conditions (see section 7).

10.3. Possibility of hazardous reactions

None known.

10.4. Conditions to avoid

Ignition sources. Heat. Open flame. Sparks.

10.5. Incompatible materials

Oxidizing agents. Strong acids. Alkalis. Halogens.

10.6. Hazardous decomposition products

Combustion produces toxic gases.

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Not classified
Skin corrosion/irritation : Not classified
Serious eye damage/irritation : Not classified
Respiratory or skin sensitisation : Not classified
Germ cell mutagenicity : Not classified

Carcinogenicity : Suspected of causing cancer.

Asphalt (8052-42-4)

IARC group 2B - Possibly carcinogenic to humans

Talc (14807-96-6)

IARC group 2B - Possibly carcinogenic to humans

Reproductive toxicity : Not classified Specific target organ toxicity (single exposure) : Not classified Specific target organ toxicity (repeated : Not classified

exposure)

Aspiration hazard : Not classified

Symptoms/injuries after inhalation : May cause respiratory irritation.

Symptoms/injuries after skin contact : May cause skin irritation.

Symptoms/injuries after eye contact : Direct contact with eyes is likely to be irritating.

Symptoms/injuries after ingestion : May cause gastrointestinal irritation.

Chronic symptoms : Suspected of causing cancer.

SECTION 12: Ecological information

12.1. Toxicity

No additional information available

12.2. Persistence and degradability

AVM Bituminous Sheet Waterproofing Membrane	
Persistence and degradability	The product is not biodegradable.

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

12.3. Bioaccumulative potential

AVM Bituminous Sheet Waterproofing Membrane	
Bioconcentration factor (BCF REACH)	Unlikely bioconcentration
Bioaccumulative potential	No possible bioaccumulation.

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

No additional information available

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste treatment methods : Obtain the consent of pollution control authorities before discharging to wastewater treatment

plants.

Waste disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.

SECTION 14: Transport information

In accordance with DOT Not hazardous for transport Additional information

Other information : No supplementary information available.

Transport by sea

No additional information available

Air transport

No additional information available

SECTION 15: Regulatory information

15.1. US Federal regulations

AVM Bituminous Sheet Waterproofing Membrane

All chemical substances in this product are listed in the EPA (Environment Protection Agency) TSCA (Toxic Substances Control Act) Inventory or are exempt

SARA Section 311/312 Hazard Classes Delayed (chronic) health hazard

15.2. International regulations

No additional information available.

15.3. US State regulations

California Proposition 65: WARNING! This product contains chemicals known to the state of California to cause cancer, birth defects, or other reproductive harm.

Asphalt (8052-42-4)

- U.S. New Jersey Right to Know Hazardous Substance List
- U.S. Pennsylvania RTK (Right to Know) List
- U.S. Massachusetts Right To Know List

Talc (14807-96-6)

- U.S. Massachusetts Right To Know List
- U.S. New Jersey Right to Know Hazardous Substance List
- U.S. Pennsylvania RTK (Right to Know) List

SECTION 16: Other information

Indication of changes : Revision 1.0: New SDS Created.

Revision date : 02/24/2017
Other information : Author: BCS.

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations


NFPA health hazard : 2 - Materials that, under emergency conditions, can cause temporary incapacitation or residual injury.

: 0 - Materials that will not burn under typical dire conditions, including intrinsically noncombustible materials such as

concrete, stone, and sand.

: 0 - Material that in themselves are normally stable, even

under fire conditions.



HMIS III Rating

NFPA fire hazard

NFPA reactivity

Health: 2*Flammability: 0Physical: 0Personal protection:

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product



Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Revision date: 03/22/2018 Supersedes: Version: 1.0

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Product name : AVM Adhesive 501

Product form : Mixture

1.2. Relevant identified uses of the substance or mixture and uses advised against

Use of the substance/mixture : Primer

1.3. Details of the supplier of the safety data sheet

AVM Industries, Inc. 8245 Remmet Ave Canoga Park, CA 91304 Tel: 818-888-0050 Fax: 818-888-0030 www.avmindustries.com

1.4. Emergency telephone number

No additional information available

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

GHS-US classification

Flam. Liq. 2 H225 Skin Irrit. 2 H315 Eye Irrit. 2 H319 Carc. 1B H350 Repr. 2 H361 STOT SE 3 H336 STOT RE 2 H373 Asp. Tox. 1 H304

2.2. Label elements

GHS-US labelling

Hazard pictograms (GHS-US)

Precautionary statements (GHS-US)



GHS07



Signal word (GHS-US) : Danger

Hazard statements (GHS-US) : H225 - Highly flammable liquid and vapour

H304 - May be fatal if swallowed and enters airways

H315 - Causes skin irritation H319 - Causes serious eye irritation H336 - May cause drowsiness or dizziness

H350 - May cause cancer

H361 - Suspected of damaging fertility or the unborn child

H373 - May cause damage to organs through prolonged or repeated exposure

: P201 - Obtain special instructions before use

P202 - Do not handle until all safety precautions have been read and understood

P210 - Keep away from heat, open flames, sparks. - No smoking

P233 - Keep container tightly closed

P240 - Ground/Bond container and receiving equipment

P241 - Use explosion-proof electrical, lighting, ventilating equipment

P242 - Use only non-sparking tools

P243 - Take precautionary measures against static discharge

P260 - Do not breathe mist, vapours

P264 - Wash hands, forearms and face thoroughly after handling

P271 - Use only outdoors or in a well-ventilated area

P280 - Wear eye protection, protective gloves, protective clothing, respiratory protection P301+P310 - IF SWALLOWED: Immediately call a POISON CENTER, a poison center

P302+P352 - If on skin: Wash with plenty of soap and water

P303+P361+P353 - IF ON SKIN (or hair): Take off immediately all contaminated clothing.

Rinse skin with water/shower

P304+P340 - IF INHALED: Remove person to fresh air and keep comfortable for breathing P305+P351+P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove

contact lenses, if present and easy to do. Continue rinsing

03/22/2018 AVM Adhesive 501 Page 1

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

P308+P313 - If exposed or concerned: Get medical advice/attention P312 - Call a POISON CENTER, a poison center if you feel unwell

P314 - Get medical advice/attention if you feel unwell

P321 - Specific treatment (see first aid instructions on this label)

P331 - Do NOT induce vomiting

P332+P313 - If skin irritation occurs: Get medical advice/attention P337+P313 - If eye irritation persists: Get medical advice/attention P362+P364 - Take off contaminated clothing and wash it before reuse

P370+P378 - In case of fire: Use carbon dioxide (CO₂), dry extinguishing powder, foam to

extinguish

P403+P233+P235 - Store in a well-ventilated place. Keep container tightly closed. Keep cool

P405 - Store locked up

P501 - Dispose of contents/container to a licensed hazardous-waste disposal contractor or collection site except for empty clean containers which can be disposed of as non-hazardous

2.3 Other hazards

No additional information available

Unknown acute toxicity (GHS US)

No data available

SECTION 3: Composition/information on ingredients

3.1. Substances

Not applicable

3.2. **Mixtures**

Name	Product identifier	%
tert-Butyl acetate	(CAS-No.) 540-88-5	20 - 40*
Distillates, petroleum, solvent-dewaxed heavy paraffinic	(CAS-No.) 64742-65-0	5 - 25*
Toluene	(CAS-No.) 108-88-3	2 - 20*

^{*}In accordance with paragraph (i) of the OSHA Hazard Communication Standard (29 CFR §1910.1200), the specific chemical identity or exact weight % has been withheld as a trade secret

SECTION 4: First aid measures

Description of first aid measures

: If exposed or concerned, get medical attention/advice. Show this safety data sheet to the First-aid measures general

doctor in attendance. Wash contaminated clothing before re-use. Never give anything to an

unconscious person.

: IF INHALED: Remove to fresh air and keep at rest in a position comfortable for breathing. Get First-aid measures after inhalation

medical attention if breathing is affected. If breathing is difficult, supply oxygen.

First-aid measures after skin contact : IF ON SKIN (or clothing): Remove affected clothing and wash all exposed skin with water for at

least 15 minutes. If irritation develops or persists, get medical attention.

: IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Remove contact First-aid measures after eye contact

lenses if present and easy to do so. Continue rinsing if pain, blinking, or irritation develops or persists, get medical attention. Continue rinsing.

: IF SWALLOWED: rinse mouth thoroughly. Do not induce vomiting without advice from poison

First-aid measures after ingestion

control center. Get medical attention if you feel unwell.

4.2. Most important symptoms and effects, both acute and delayed

Symptoms/effects : May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye

irritation. May cause drowsiness or dizziness. May cause cancer. Suspected of damaging fertility. Suspected of damaging the unborn child. May cause damage to organs through

prolonged or repeated exposure.

Symptoms/effects after inhalation : May cause drowsiness or dizziness.

Symptoms/effects after skin contact : Causes skin irritation. Symptoms/effects after eye contact : Causes serious eye irritation.

Symptoms/effects after ingestion : May be fatal if swallowed and enters airways.

Chronic symptoms : May cause cancer. Suspected of damaging fertility. Suspected of damaging the unborn child. .

May cause damage to organs through prolonged or repeated exposure.

4.3 Indication of any immediate medical attention and special treatment needed

No additional information available

SECTION 5: Firefighting measures

5.1. Extinguishing media

Suitable extinguishing media : Water fog. Foam. Dry chemical. carbon dioxide (CO2).

5.2. Special hazards arising from the substance or mixture

: Highly flammable liquid and vapour. Fire hazard

03/22/2018 AVM Adhesive 501 2/7

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Explosion hazard : Heating may cause an explosion.

Reactivity : No dangerous reactions known under normal conditions of use.

5.3. Advice for firefighters

Precautionary measures fire : Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No

smoking.

Firefighting instructions : Use water spray or fog for cooling exposed containers. Exercise caution when fighting any

chemical fire. Do not dispose of fire-fighting water in the environment.

Protection during firefighting : Do not enter fire area without proper protective equipment, including respiratory protection.

Other information : Avoid smoke inhalation.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

General measures : Evacuate area. Ventilate area. Keep upwind. Spill should be handled by trained clean-up crews

properly equipped with respiratory equipment and full chemical protective gear (see Section 8).

6.1.1. For non-emergency personnel

Protective equipment : Wear Protective equipment as described in Section 8.

Emergency procedures : Evacuate unnecessary personnel.

6.1.2. For emergency responders

Protective equipment : Wear suitable protective clothing, gloves and eye or face protection. Approved supplied-air

respirator, in case of emergency.

6.2. Environmental precautions

Avoid release to the environment. Prevent entry to sewers and public waters.

6.3. Methods and material for containment and cleaning up

For containment : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or

streams.

Methods for cleaning up : Ventilate area. Eliminate ignition sources. Use only non-sparking tools. Soak up residue with an

absorbent such as clay, sand or other suitable material. This material and its container must be disposed of in a safe way, and as per local legislation. Foam, especially high expansion foam,

may be used to suppress vapors.

6.4. Reference to other sections

See Sections 8 and 13.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Precautions for safe handling : Do not handle until all safety precautions have been read and understood. Ensure proper

electrical grounding procedures are in place. Avoid contact with skin, eyes and clothing. Do not breathe mist, vapours. Wash hands and other exposed areas with mild soap and water before

eating, drinking or smoking and when leaving work.

7.2. Conditions for safe storage, including any incompatibilities

Storage conditions : Keep away from ignition sources. Store in a well-ventilated place. Keep cool.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Toluene (108-88-3)	
ACGIH TWA (ppm)	20 ppm
Remark (ACGIH)	Visual impair; female repro;
OSHA PEL (TWA) (ppm)	200 ppm
OSHA PEL (Ceiling) (ppm)	300 ppm (500 ppm Peak [10 minutes])

Distillates, petroleum, solvent-dewaxed heavy paraffinic (64742-65-0)		
Remark (ACGIH)	OELs not established	
Remark (OSHA)	OELs not established	

tert-Butyl acetate (540-88-5)	
ACGIH TWA (ppm)	200 ppm
Remark (ACGIH)	Threshold Limit Values (TLV Basis) Critical Effects - eye and upper respiratory tract irritation
OSHA PEL (TWA) (mg/m³)	950 mg/m³
OSHA PEL (TWA) (ppm)	200 ppm

03/22/2018 AVM Adhesive 501 3/7

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

8.2. Exposure controls

Appropriate engineering controls

: Provide adequate general and local exhaust ventilation. Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below recommended exposure limits. Use explosion-proof equipment with flammable materials. Ensure adequate ventilation, especially in confined areas.

Personal protective equipment

Gloves. Protective goggles. Wear chemically impervious apron over labcoat and full coverage clothing. Insufficient ventilation: wear respiratory protection.









Hand protection

Use gloves chemically resistant to this material when prolonged or repeated contact could occur. Gloves should be classified under Standard EN 374 or ASTM F1296. Suggested glove materials are: Neoprene, Nitrile/butadiene rubber, Polyethylene, Ethyl vinyl alcohol laminate, PVC or vinyl. Suitable gloves for this specific application can be recommended by the glove supplier.

Eye protection

: Wear eye protection, including chemical splash goggles and a face shield when possibility exists for eye contact due to spraying liquid or airborne particles.

Skin and body protection

: Wear long sleeves, and chemically impervious PPE/coveralls to minimize bodily exposure.

Respiratory protection

Use NIOSH (or other equivalent national standard) -approved dust/particulate respirator. Where vapor, mist, or dust exceed PELs or other applicable OELs, use NIOSH-approved respiratory protective equipment.

SECTION 9: Physical and chemical properties

9.1. Information on basic physical and chemical properties

Physical state : Liquid
Color : Red. Brown.

Odor : characteristic. Solvent.
Odor Threshold : No data available
pH : No data available
Relative evaporation rate (butylacetate=1) : No data available

Relative evaporation rate (ether=1) : <

: No data available Melting point Freezing point : No data available **Boiling point** : 97.8 °C (208 °F) : 16.7 °C (62.1 °F) Flash point Auto-ignition temperature : No data available Decomposition temperature : No data available : No data available Flammability (solid, gas) Vapour pressure No data available Relative vapour density at 20 °C : > 1 (Air = 1)

Weight Per Gallon : 7.87 Relative density : No data available Solubility : No data available Log Pow : No data available Log Kow : No data available : No data available Viscosity, kinematic Viscosity, dynamic No data available Explosive properties No data available Oxidising properties : No data available : No data available Explosive limits

9.2. Other information

VOC content : 98 g/l < 5 % Volatile by Weight

SECTION 10: Stability and reactivity

10.1. Reactivity

No dangerous reactions known under normal conditions of use.

10.2. Chemical stability

Stable under recommended handling and storage conditions (see section 7).

03/22/2018 AVM Adhesive 501 4/7

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

10.3. Possibility of hazardous reactions

None known.

10.4. Conditions to avoid

Static electricity. Heat. Sparks. Open flame.

10.5. Incompatible materials

Strong oxidizing agents.

10.6. Hazardous decomposition products

Carbon oxides (CO, CO₂).

SECTION 11: Toxicological information

11.1. Information on toxicological effects

Acute toxicity : Not classified

<u></u>		
Toluene (108-88-3)		
LD50 oral rat	2600 mg/kg	
LD50 dermal rabbit	12000 mg/kg	
LC50 inhalation rat (mg/l)	12.5 mg/l/4h	

tert-Butyl acetate (540-88-5)

LC50 inhalation rat (mg/l) > 2230 mg/m³ 4 h

Skin corrosion/irritation : Causes skin irritation.
Serious eye damage/irritation : Causes serious eye irritation.

Respiratory or skin sensitisation : Not classified
Germ cell mutagenicity : Not classified
Carcinogenicity : May cause cancer.

Reproductive toxicity : Suspected of damaging fertility or the unborn child.

Specific target organ toxicity (single exposure) : May cause drowsiness or dizziness.

Specific target organ toxicity (repeated

exposure)

: May cause damage to organs through prolonged or repeated exposure.

Aspiration hazard : May be fatal if swallowed and enters airways.

Symptoms/effects after inhalation : May cause drowsiness or dizziness.

Symptoms/effects after skin contact : Causes skin irritation.

Symptoms/effects after eye contact : Causes serious eye irritation.

Symptoms/effects after ingestion : May be fatal if swallowed and enters airways.

Chronic symptoms : May cause cancer. Suspected of damaging fertility. Suspected of damaging the unborn child.

May cause damage to organs through prolonged or repeated exposure.

SECTION 12: Ecological information

12.1. Toxicity

No additional information available

12.2. Persistence and degradability

No additional information available

12.3. Bioaccumulative potential

No additional information available

12.4. Mobility in soil

No additional information available

12.5. Other adverse effects

No additional information available

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Waste treatment methods : Obtain the consent of pollution control authorities before discharging to wastewater treatment

plants.

Product/Packaging disposal recommendations : Dispose in a safe manner in accordance with local/national regulations.

SECTION 14: Transport information

In accordance with DOT

Transport document description : UN1993 Flammable liquids, n.o.s. (contains: Toluene; tert-Butyl acetate), 3, II

03/22/2018 AVM Adhesive 501 5/7

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

UN-No.(DOT) : 1993 DOT NA no. : UN1993

Proper Shipping Name (DOT) : Flammable liquids, n.o.s.

contains: Toluene; tert-Butyl acetate

Class (DOT) : 3 - Class 3 - Flammable and combustible liquid 49 CFR 173.120

Hazard labels (DOT) : 3 - Flammable liquid

FLAMMABLE LIQUID

Packing group (DOT) : II - Medium Danger

DOT Quantity Limitations Passenger aircraft/rail : 5 L

(49 CFR 173.27)

DOT Quantity Limitations Cargo aircraft only (49 : 60 L

CFR 175.75)

DOT Vessel Stowage Location : B - (i) The material may be stowed "on deck" or "under deck" on a cargo vessel and on a

passenger vessel carrying a number of passengers limited to not more than the larger of 25 passengers, or one passenger per each 3 m of overall vessel length; and (ii) "On deck only" on passenger vessels in which the number of passengers specified in paragraph (k)(2)(i) of this

section is exceeded.

Additional information

Emergency Response Guide (ERG) Number : 128

Other information : No supplementary information available.

Transport by sea

No additional information available

Air transport

No additional information available

SECTION 15: Regulatory information

15.1. US Federal regulations

AVM Adhesive 501	
All chemical substances in this product are lis or are exempt	ted in the EPA (Environment Protection Agency) TSCA (Toxic Substances Control Act) Inventory
SARA Section 311/312 Hazard Classes	Physical hazard - Flammable (gases, aerosols, liquids, or solids) Health hazard - Skin corrosion or Irritation Health hazard - Serious eye damage or eye irritation Health hazard - Carcinogenicity Health hazard - Specific target organ toxicity (single or repeated exposure) Health hazard - Reproductive toxicity Health hazard - Aspiration hazard

CEDCI A DO	4000 lb				
CERCLA RQ	1000 lb				
Section 313	Listed on US SARA Section 313				
tert-Butyl acetate (540-88-5)					
CERCLA RQ	5000 lb				
Section 313	Not Listed on US SARA Section 313				

15.2. International regulations

No additional information available.

15.3. US State regulations

Toluene (108-88-3)

WARNING! This product contains chemicals known to the state of California to cause cancer, birth defects, or other reproductive harm.

Toluene (108-88-3)				
U.S California - Proposition 65 - Carcinogens List	U.S California - Proposition 65 - Developmental Toxicity	U.S California - Proposition 65 - Reproductive Toxicity - Female	U.S California - Proposition 65 - Reproductive Toxicity - Male	No significant risk level (NSRL)
No	Yes	No	No	7000 µg/day

03/22/2018 AVM Adhesive 501 6/7

Safety Data Sheet

Prepared according to Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules and Regulations

Toluene (108-88-3)

- U.S. Massachusetts Right To Know List
- U.S. New Jersey Right to Know Hazardous Substance List
- U.S. Pennsylvania RTK (Right to Know) Environmental Hazard List
- U.S. Pennsylvania RTK (Right to Know) List

tert-Butyl acetate (540-88-5)

- U.S. Massachusetts Right To Know List
- U.S. New Jersey Right to Know Hazardous Substance List
- U.S. Pennsylvania RTK (Right to Know) Environmental Hazard List

SECTION 16: Other information

: Revision 1.0: New SDS Created. Indication of changes

: 03/22/2018 Revision date : Author: BCS. Other information

NFPA health hazard : 3 - Materials that, under emergency conditions, can cause

serious or permanent injury.

NFPA fire hazard : 4 - Materials that rapidly or completely vaporize at

atmospheric pressure and normal ambient temperature or

that are readily dispersed in air and burn readily.

NFPA reactivity : 1 - Materials that in themselves are normally stable but can

become unstable at elevated temperatures and pressures.



Hazard Rating

Health : 3* : 4 Flammability Physical : 1 Personal protection


This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product

03/22/2018 AVM Adhesive 501 7/7 DETAIL #: AVM-0580-AL-0003-M

AUSSIE MATE® 580-AL

LARR Methane
Retaining Walls
Methane Underslab - Non-Hydrostatic
AVM AUSSIE MATE® 580-AL
Bituminous Sheet Waterproofing.



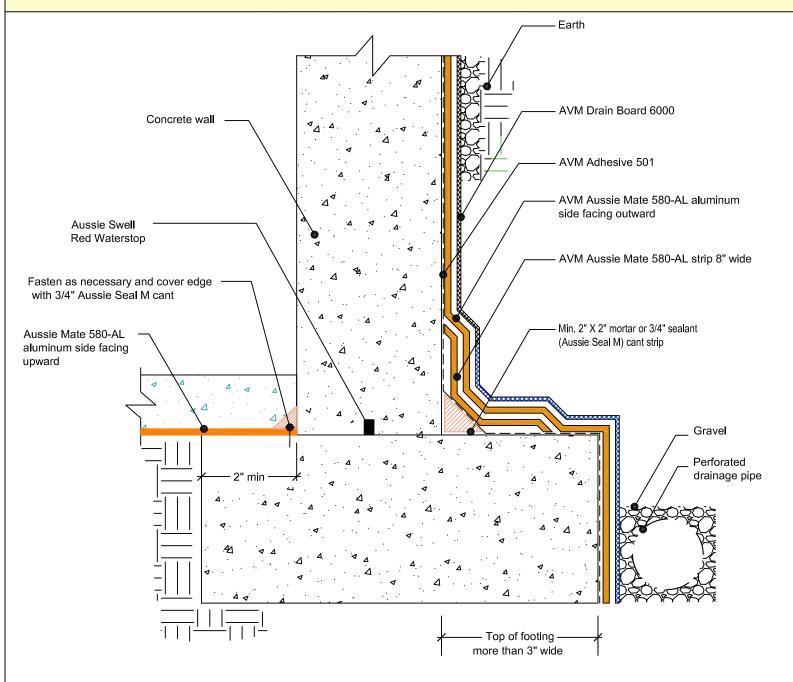

NOTES:

- 1. Aussie Mate 580-AL is an LARR approved Waterproofing membrane and Methane Barrier.
- 2. Aussie Mate 580-AL is a UV stable, 60-mil heavy duty bituminous sheet membrane with aluminum protection layer for Below-Grade waterproofing applications. Aussie Mate 580-AL may also be used as a methane and/or vapor barrier under horizontal slabs on grade.
- For applications from 25°F-50°F, contact AVM for cold weather installation instructions.
- 4. For appropriate drainage/protection, use AVM Drain Board 6000.
- 5. Contact AVM if no drain board or protection board is specified.
- 5. AVM's "Bottom Drain 12" may be accepted in lieu of the perforated drainage pipe (French Drain). Check local building codes for approval.
- Exposed top of footing is More than 3"
- 8. Inside corner (Wall-to-Footing) shown with Waterstop
- 9. All Aussie Membrane 580-AL overlaps must be minimum 2".

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304

Quality Waterproofing Products


888.414.1041 818.888.0050 www.avmindustries.com

DETAIL #: AVM-Aussie-Mate-4001-M

AUSSIE MATE 580-AL

LARR Methane
Under Slab - Methane
Membrane Over Compacted Earth
AVM AUSSIE MATE® 580-AL
Bituminous Sheet Waterproofing.



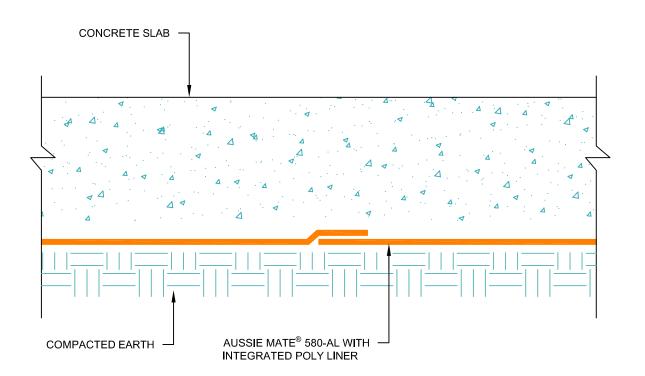

NOTES

- 1. Aussie Mate 580-AL is an LARR approved Waterproofing membrane and Methane Barrier.
- 2. Aussie Mate 580-AL is a UV stable, 60-mil heavy duty bituminous sheet membrane with aluminum protection layer for Below-Grade waterproofing applications. Aussie Mate 580-AL may also be used as a methane and/or vapor barrier under horizontal slabs on grade.
- 3. For applications from 25°F-50°F, contact AVM for cold weather installation instructions.
- 4. All Aussie Mate overlaps must be minimum 2.0". See "Lapping Details" for more information
- 5. When installed underslabs do not remove integrated poly liner (release liner).
- 6. Shown without protection. Consult with Methane Engineer for membrane protection requirements.

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304

Quality Waterproofing Products


888.414.1041 818.888.0050 www.avmindustries.com

DETAIL #: AVM-0580-AL-6712-M

AUSSIE MATE® 580-AL

LARR Methane
Pipe Penetration Thru Slab
AVM AUSSIE MATE 580-AL
Bituminous Sheet Waterproofing.



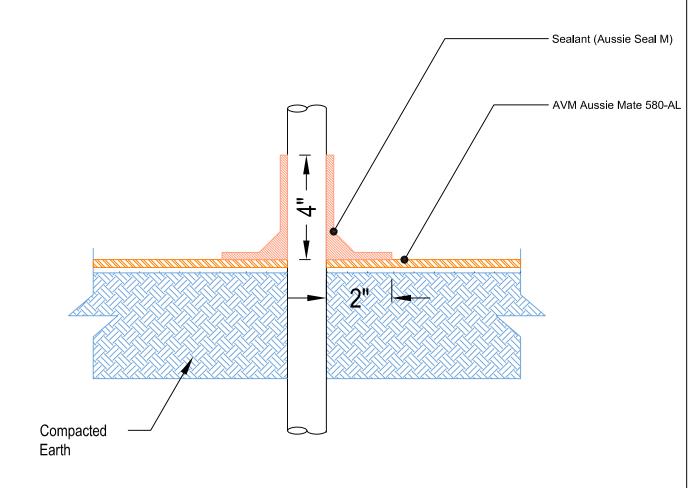

NOTES:

- 1. Aussie Mate 580-AL is an LARR approved Waterproofing membrane and Methane Barrier.
- 2. Aussie Mate 580-AL is a UV stable, 60-mil heavy duty bituminous sheet membrane with aluminum protection layer for Below-Grade waterproofing applications. Aussie Mate 580-AL may also be used as a methane and/or vapor barrier under horizontal slabs on grade.
- 3. For applications from 25°F-50°F, contact AVM for cold weather installation instructions.
- For appropriate drainage/protection, use AVM Drain Board 6000.
- 5. Contact AVM if no drain board or protection board is specified.
- 6. All Aussie Membrane 580-AL overlaps must be minimum 2".
- 7. With Sealant (Aussie Seal®) around pipe.

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304


Quality Waterproofing Products

888.414.1041 818.888.0050 www.aymindustries.com DETAIL #: AVM-Aussie-Mate-4011-M

AUSSIE MATE 580-AL

LARR Methane
Under Slab - Methane
Membrane Over Severely Contaminated Earth
AVM AUSSIE MATE® 580-AL
Bituminous Sheet Waterproofing.



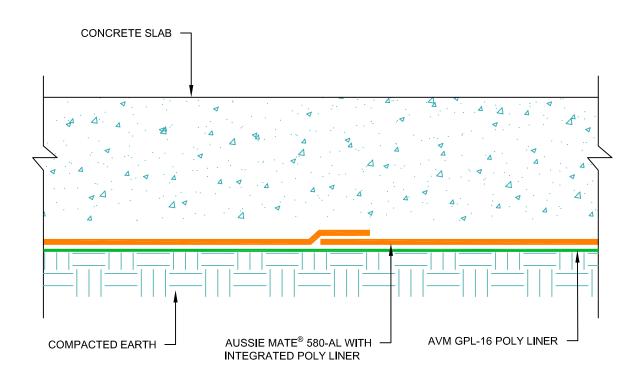

NOTES

- 1. Aussie Mate 580-AL is an LARR approved Waterproofing membrane and Methane Barrier.
- 2. Aussie Mate 580-AL is a UV stable, 60-mil heavy duty bituminous sheet membrane with aluminum protection layer for Below-Grade waterproofing applications.

 Aussie Mate 580-AL may also be used as a methane and/or vapor barrier under horizontal slabs on grade.
- 3. For applications from 25°F-50°F, contact AVM for cold weather installation instructions.
- 4. All Aussie Mate overlaps must be minimum 2.0". See "Lapping Details" for more information
- 5. When installed underslabs do not remove integrated poly liner (release liner).
- 6. Shown without protection. Consult with Methane Engineer for membrane protection requirements.
- 7. Use this detail if membrane will be exposed to abnormally high levels of oil.

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304

Quality Waterproofing Products

888.414.1041 818.888.0050 www.avmindustries.com

DETAIL #: AVM-0580-AL-7004

AUSSIE MATE® 580-AL

Lapping Detail #2
AVM AUSSIE MATE® 580-AL
Bituminous Sheet Waterproofing.




FACTORY LAP



Important Note: When installing the "Factory Lap", The Installation procedure should be as follows:

- 1. Before bonding the next layer of Aussie Mate 580-AL to an existing layer, Remove both clear plastic films from the factory laps (Where the aluminum protection layer ends)
- 2. Make sure surfaces are clean before bonding overlaps.
- 3. Install the next sheet of Aussie Mate 580-AL with a minimum 2" overlap.
- 4. Roll the steel roller over the lap several times while applying pressure to ensure proper adhesion.
- 5. In cold weather, using heat gun will improve adhesion.

NON-FACTORY LAP

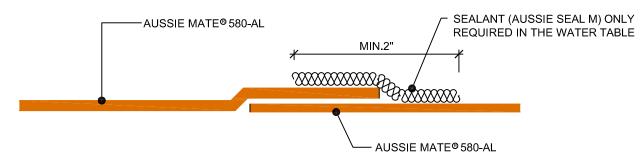

Important Note: When installing the "Non-Factory Lap", The Installation procedure should be as follows:

- 1. Make sure surfaces are clean before bonding overlaps.
- 2. Install the next sheet of Aussie Mate 580-AL with a minimum 2" overlap.
- 3. Roll the steel roller over the lap several times while applying pressure to ensure proper adhesion.
- 4. In cold weather, using heat gun will improve adhesion.
- 5. In the water-table, on non-factory laps Apply Sealant (Aussie Seal M) over the seam.

NOTES:

- 1. Aussie Mate 580-AL is an LARR approved Waterproofing membrane and Methane Barrier.
- 2. Aussie Mate 580-AL is a UV stable, 60-mil heavy duty bituminous sheet membrane with aluminum protection layer for Below-Grade waterproofing applications. Aussie Mate 580-AL may also be used as a methane and/or vapor barrier under horizontal slabs on grade.
- 3. For applications from 25°F- 50°F, contact AVM for cold weather installation instructions.

AVM Industries, Inc. 8245 Remmet Ave, Canoga Park, CA 91304

FILE NAME: 0580-AL-7004-Lapping-Detail-2

Quality Waterproofing Products

888.414.1041 818.888.0050 www.avmindustries.com