


DETAIL #:
 0580-AL-6710-M
 System:
 Aussie Mate 580-AL Methane

Multiple Pipe Bank Pitch Pan



**AVM AUSSIE MATE 580-AL
 METHANE / VOC BARRIER ONLY**

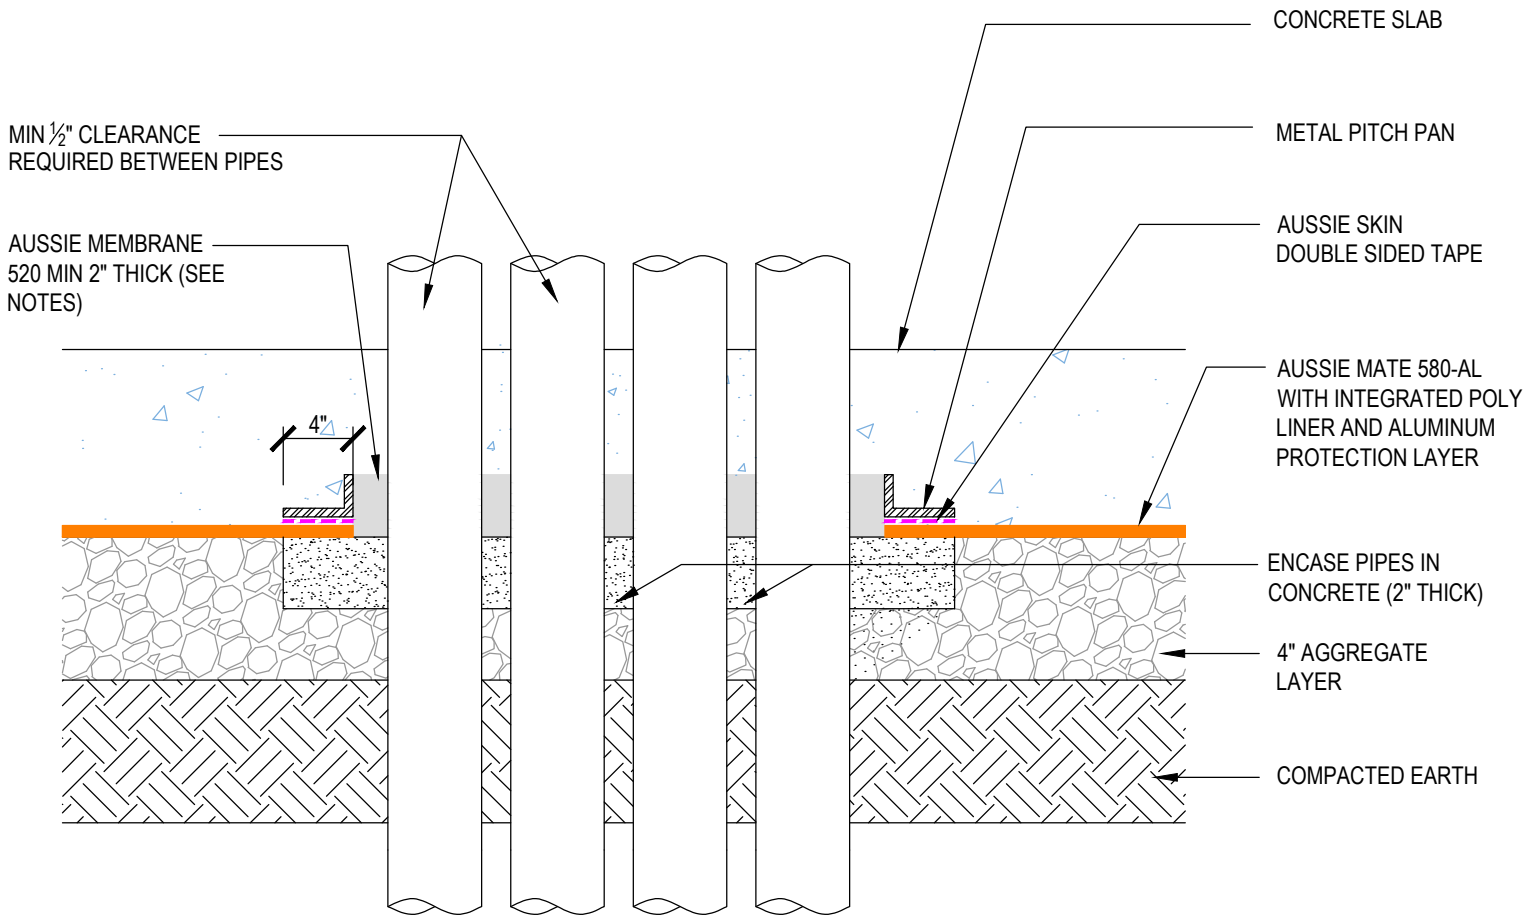

INSTALL AUSSIE MATE 580-AL WITH ALUMINUM SIDE FACING INSTALLER

Notes:

1. Aussie Mate 580-AL is an LARR approved Waterproofing membrane and Methane Barrier.
2. Aussie Mate 580-AL is a UV stable, heavy duty bituminous sheet membrane with aluminum protection layer for Below-Grade waterproofing applications and is available in a 60 mil or 80 mil thickness . Aussie Mate 580-AL may also be used as a methane and/or vapor barrier under horizontal slabs on grade.
3. All Aussie Mate overlaps must be minimum 2-1/2" - See "Lapping Details" for more information
4. When installed under slab do not remove integrated poly liner (release liner).
5. Shown without protection. Consult with Methane Engineer for membrane protection requirements.
6. Aussie Membrane 520 must be cured prior to concrete placement, which may take up to 72 hours. Please consult AVM if scheduling does not allow this.